

Module 2.7: Linearly Separable Boolean Functions

- So what do we do about functions which are not linearly separable ?

- So what do we do about functions which are not linearly separable ?
- Let us see one such simple boolean function first ?

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 0 \geq 0 \implies w_1 > -w_0$$

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 0 \geq 0 \implies w_1 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 1 \geq 0 \implies w_1 + w_2 < -w_0$$

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$


$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 0 \geq 0 \implies w_1 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 1 \geq 0 \implies w_1 + w_2 < -w_0$$

- The fourth condition contradicts conditions 2 and 3

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$



$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 0 \geq 0 \implies w_1 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 1 \geq 0 \implies w_1 + w_2 < -w_0$$

- The fourth condition contradicts conditions 2 and 3
- Hence we cannot have a solution to this set of inequalities

x_1	x_2	XOR	
0	0	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$
1	0	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
0	1	1	$w_0 + \sum_{i=1}^2 w_i x_i \geq 0$
1	1	0	$w_0 + \sum_{i=1}^2 w_i x_i < 0$


$$w_0 + w_1 \cdot 0 + w_2 \cdot 0 < 0 \implies w_0 < 0$$

$$w_0 + w_1 \cdot 0 + w_2 \cdot 1 \geq 0 \implies w_2 > -w_0$$

$$w_0 + w_1 \cdot 1 + w_2 \cdot 0 \geq 0 \implies w_1 > -w_0$$


$$w_0 + w_1 \cdot 1 + w_2 \cdot 1 \geq 0 \implies w_1 + w_2 < -w_0$$


- The fourth condition contradicts conditions 2 and 3
- Hence we cannot have a solution to this set of inequalities




- And indeed you can see that it is impossible to draw a line which separates the red points from the blue points

- Most real world data is not linearly separable and will always contain some outliers







- Most real world data is not linearly separable and will always contain some outliers
- In fact, sometimes there may not be any outliers but still the data may not be linearly separable



- Most real world data is not linearly separable and will always contain some outliers
- In fact, sometimes there may not be any outliers but still the data may not be linearly separable
- We need computational units (models) which can deal with such data



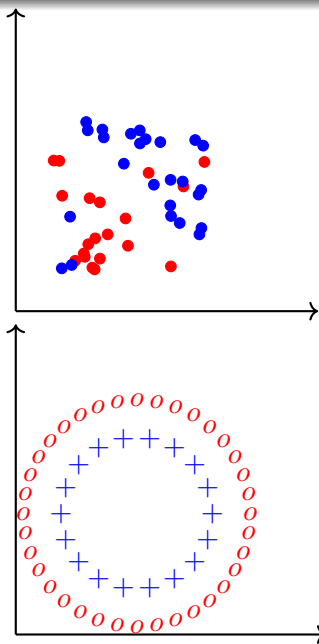

- Most real world data is not linearly separable and will always contain some outliers
- In fact, sometimes there may not be any outliers but still the data may not be linearly separable
- We need computational units (models) which can deal with such data
- While a single perceptron cannot deal with such data, we will show that a network of perceptrons can indeed deal with such data

- Before seeing how a network of perceptrons can deal with linearly inseparable data, we will discuss boolean functions in some more detail ...

- How many boolean functions can you design from 2 inputs ?

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2
0	0
0	1
1	0
1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1
0	0	0
0	1	0
1	0	0
1	1	0

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_{16}
0	0	0	1
0	1	0	1
1	0	0	1
1	1	0	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_{16}
0	0	0	0	1
0	1	0	0	1
1	0	0	0	1
1	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_8	f_{16}
0	0	0	0	0	1
0	1	0	0	1	1
1	0	0	0	1	1
1	1	0	1	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_8	f_{16}
0	0	0	0	0	0	1
0	1	0	0	0	1	1
1	0	0	0	1	1	1
1	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_8	f_{16}
0	0	0	0	0	0	0	1
0	1	0	0	0	0	1	1
1	0	0	0	1	1	1	1
1	1	0	1	0	1	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_8	f_{16}
0	0	0	0	0	0	0	0	1
0	1	0	0	0	0	1	1	1
1	0	0	0	1	1	0	1	1
1	1	0	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_8	f_{16}
0	0	0	0	0	0	0	0	0	1
0	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_{16}
0	0	0	0	0	0	0	0	0	0	1
0	1	0	0	0	0	1	1	1	1	1
1	0	0	0	1	1	0	0	1	1	1
1	1	0	1	0	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1
0	1	0	0	0	0	1	1	1	1	0	1
1	0	0	0	1	1	0	0	1	1	0	1
1	1	0	1	0	1	0	1	0	1	0	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	1
1	0	0	0	1	1	0	0	1	1	0	0	1
1	1	0	1	0	1	0	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ?

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ? (turns out all except XOR and !XOR - feel free to verify)

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ? (turns out all except XOR and !XOR - feel free to verify)
- In general, how many boolean functions can you have for n inputs ?

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ? (turns out all except XOR and !XOR - feel free to verify)
- In general, how many boolean functions can you have for n inputs ? 2^{2^n}

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ? (turns out all except XOR and !XOR - feel free to verify)
- In general, how many boolean functions can you have for n inputs ? 2^{2^n}
- How many of these 2^{2^n} functions are not linearly separable ?

- How many boolean functions can you design from 2 inputs ?
- Let us begin with some easy ones which you already know ..

x_1	x_2	f_1	f_2	f_3	f_4	f_5	f_6	f_7	f_8	f_9	f_{10}	f_{11}	f_{12}	f_{13}	f_{14}	f_{15}	f_{16}
0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
0	1	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
1	0	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

- Of these, how many are linearly separable ? (turns out all except XOR and !XOR - feel free to verify)
- In general, how many boolean functions can you have for n inputs ? 2^{2^n}
- How many of these 2^{2^n} functions are not linearly separable ? For the time being, it suffices to know that at least some of these may not be linearly inseparable (I encourage you to figure out the exact answer :-)